



BASELITE – ARBOR – MED – SPECIFICATION SHEET



W5174/42-49/ST18/49/BA7/100MED

PROJECT NAME: _____ PROJECT TYPE: _____

NOTES: **BABA COMPLIANT**

*FOR A COMPLETE MODEL NUMBER, MAKE A SELECTION FROM THE DROP DOWNS BELOW. SKIP SECTIONS THAT DO NOT APPLY.

MODEL

EXAMPLE: W513 41 E16 SQ 1/2" 41 150MED PR3 GR13 41

A - SHADES

ARBOR

- W511 – 100MED (MAX)
- W5114 – 100MED (MAX)
- W513 – 150MED (MAX)
- W5134 – 150MED (MAX)
- W517 – 200MED (MAX)
- W5174 – 200MED (MAX)
- WV5174 – 200MED (MAX)
- SWS17 – 200MED (MAX)
- W5175 – 200MED (MAX)
- W5136 – 200MED (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
(*SEE NOTES FOR LIMITATIONS*)

- 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

1/2" ARM EXTENSIONS

E1, E2, E3, E4, B1, E16, E17, E27

3/4" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

1/2" WALL MOUNT

B13, WM13, WM13R, WM13X, B10, B11, B101

3/4" WALL MOUNT

B9, B9C, B12, WM14, WM14X, WM15, WM18, WM35, WM35X, WM55, WM55X, WM60, WM60X, WM61, WM61X, WM70, WM70X, WM71, WM71X

CORD MOUNT (INC)

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB, TLW, TLW, RCB, RCW, RCHB, RCHW, FHB, FHW, CBLC, CWHC, CHB, CHW

STEM MOUNT

ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

INC ADD-ONS

CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2", SLC3/4" STC1/2"

UNIVERSAL ADD-ONS

SQ 1/2", SQ 3/4", FH 1/2", FH 3/4", TRB 1/2", TRB 3/4", SWL, LGSWL, CNK, INB, RINB

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – WATTAGE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

MEDIUM BASE (MED) WATTAGE OPTIONS
150, 200

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

CL3, CL4, BL3, BL4, RE3, RE4, GR3, GR4, AH3, AH4, FR3, FR4, PR3, PR4, BA, BAX, BAF, PR8, PR8F, FN, OC

J – ACCESSORIES

GR11, GR13, GR17, REF, UGR, LGR13, LGR17, CRL13, CRL17, FLE11, FLE13, FLE17, FGR11, FGR13, FGR17, GU-1, GU-2, WG-1, WG-2


K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.


NOTES

- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- (2). FINISH OPTIONS 19, 21, 22, 23, 75,76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
- (6). ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
- (7). ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
- (8). ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.
- (9). FIXTURE DIMENSIONS MAY VARY ±0.25.
- (10). CORD AND CANOPY COME IN THE SAME COLOR.

SHADE DIMENSIONS




W5136 H-10.25" W-13"

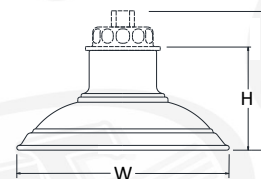

W511 H-5.5" W-11"


W5114 H-7.5" W-11"

*W5114 – WITH CAST ALUMINUM TOP
*W511 – NO TOP

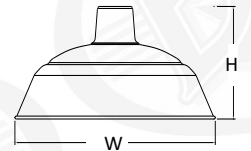


W513 H-8" W-13"

W517 H-8" W-17"

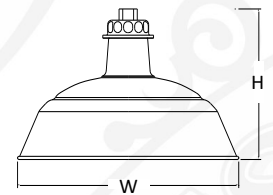

W5134 H-9.5" W-13"

W5174 H-9.5" W-17"

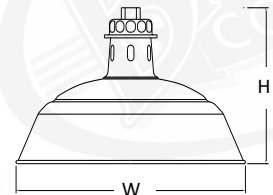


WV5174 H-9.5" W-17"

*SHADE RATED FOR DRY LOCATION ONLY



SWS17 H-9" W-17"

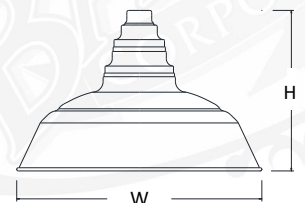










W5175 H-11" W-17"



C - MOUNTING OPTIONS
















1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED *E27 CUSTOM BACK PLATE - 8" (H) .5" (W)



3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

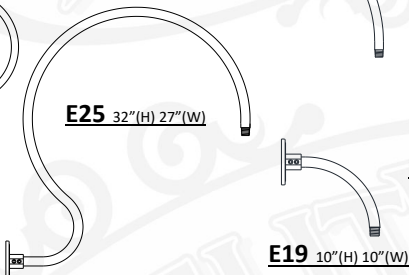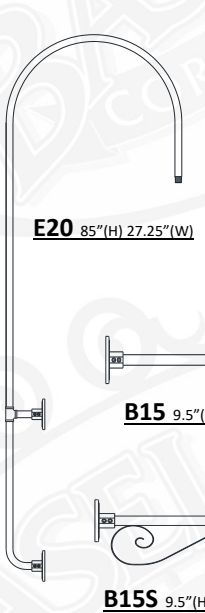

NOTES:






- * All arms sold with Cast Backplate (CB)
- * Backplate may vary in size depending on light source.

E14

- * Baselite will take your sketch and fabricate a custom arm extension to meet your needs
- * Dimensions to be determined by customer





1/2" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED



3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED






C - MOUNTING OPTIONS (CONTINUED)


3/4" WALL MOUNTS

*MOUNTS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF MOUNTS ARE DIMENSIONED

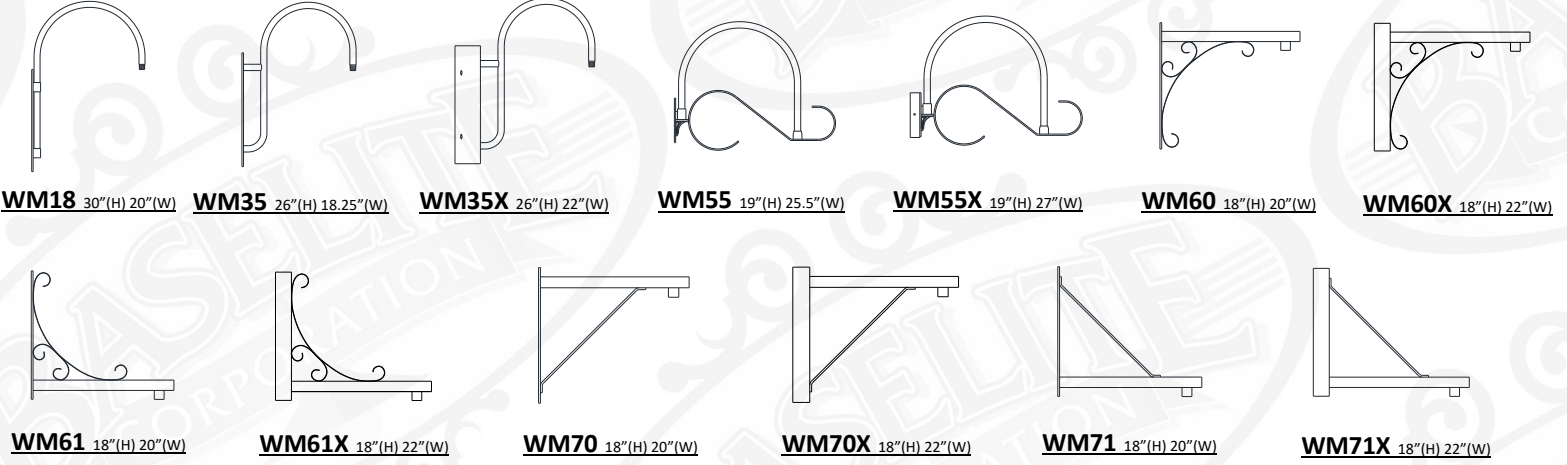


STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

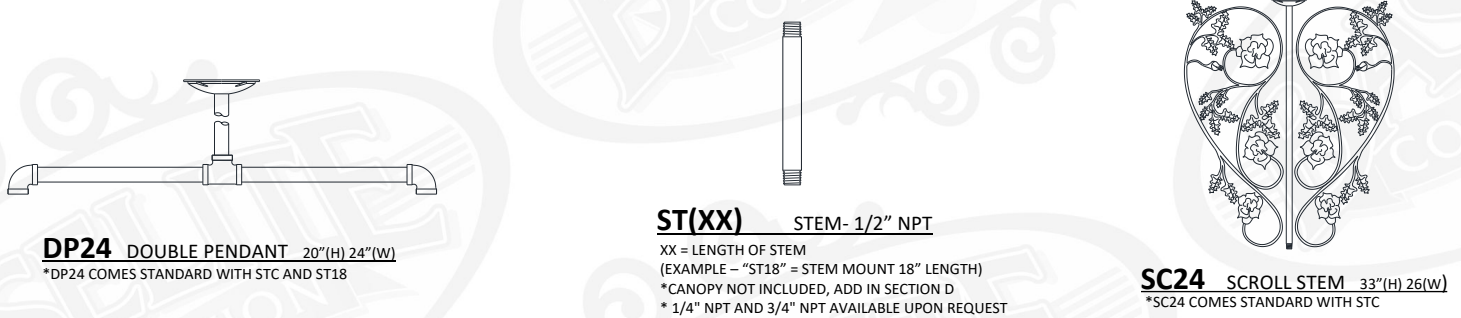

CORD MOUNTS

*MEDIUM BASE MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. *LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT *CORDS RATED FOR DRY LOCATION
*CANOPY DIMENSIONS: .625" (H) 5.25" (W) *CORD AND CANOPY COME IN THE SAME COLOR.

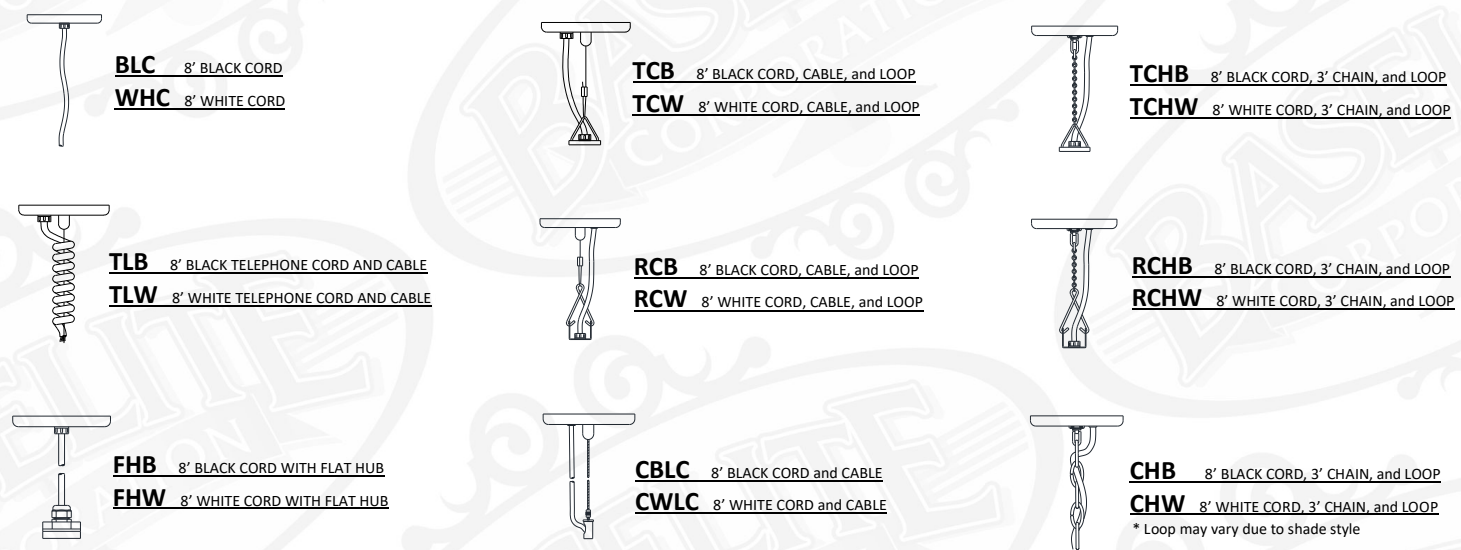





D - MOUNTING ADD-ONS

INCANDESCENT ARM ADD-ONS


* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.




CB 1/2" CAST ALUMINUM BACKPLATE 1/2 NPT
CB 3/4" CAST ALUMINUM BACKPLATE 3/4 NPT



CBC 1/2" 1/2" BACKPLATE COVER
CBC 3/4" 3/4" BACKPLATE COVER
* Includes slip ring to hold 1/2" or 3/4" arm extension in place



SLC 1/2" SLOPE CEILING CANOPY 1/2"
SLC 3/4" SLOPE CEILING CANOPY 3/4"
*(Slopes To 20 Degrees)



STC 1/2" 1/2" STEM MOUNT CANOPY


UNIVERSAL STEM AND ARM ADD-ONS

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:


MODEL #: -/-/LW/TM, TRB 1/2", LGSW/L-/-/
A B C D E F G H I J K




CNK CANOPY For MULTIPLE FIXTURES
*CNK dimensions vary on number of fixtures applied



LGSWL 1/2" NPT SWIVEL
*For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



TRB 1/2" - 4' CABLE SUPPORT
TRB 3/4" - 4' CABLE SUPPORT

F - WATTAGE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

MEDIUM BASE E26 (MED) FOR LED, CFL OR INCANDESCENT BULBS

100MED (MAX)- W511, W5114
150MED (MAX)- W513, W5134
200MED (MAX)- W5136, W517, SWS17, W5174, W5175, WV5174

*IMPORTANT - FOR MEDIUM BASE (MED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / 150MED /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100MED	100	PER BULB SPECS	PER BULB SPECS	120-277 VAC	PER BULB SPECS
150MED	150	PER BULB SPECS	PER BULB SPECS	120-277 VAC	PER BULB SPECS
200MED	200	PER BULB SPECS	PER BULB SPECS	120-277 VAC	PER BULB SPECS

*FIXTURE WATTAGE CAN BE DE-RATED TO MEET CODE COMPLIANCE "XXMED" - XX = DESIRED WATTAGE RATING BELOW MAX.



I – GLASS OPTIONS

NOTE : GLASS IS HEAT REISSTANCE BOROSILICATE. *TEMPERD GLASS AVAILABLE UPON REQUEST. CONTACT YOUR LOCAL SALES REPRESENTATIVE FOR INFORMATION OR CALL FACTORY FOR QUESTIONS.



CL3 3" CLEAR GLASS
CL4 4" CLEAR GLASS



PR3 3" PRISMATIC GLASS
PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS
RE4 4" RED GLASS



BL3 3" BLUE GLASS
BL4 4" BLUE GLASS



BA 6" OPAL BALL
(100W INC MAX/LED12W)



BAX 9" CLEAR GLOBE
BAF 9" FROSTED GLOBE
(200W INC MAX/LED25W)



FN 8" CLEAR TEXTURED GLOBE
(150W INC MAX/LED25W)




FR3 3" FROSTED GLASS
FR4 4" FROSTED GLASS



AH3 3" AMBER HYDE GLASS
AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS
GR4 4" GREEN GLASS

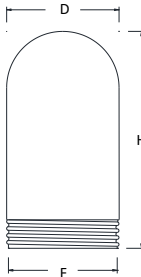

GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"

GLASS – MAX WATTAGE	
3" GLASS – 100W INC / LED25W	
4" GLASS – 200W INC / LED25W	



BA7 7" CLEAR GLOBE
BA7F 7" FROSTED GLOBE
(100W INC MAX/LED25W)




PR8 8" PRISMATIC
PR8F 8" PRISMATIC FROSTED
(200W INC MAX/LED45W)




OC 8" OPAL TAPERED GLOBE
(60W INC MAX/LED25W)


J – ACCESSORIES




GR11 11" WIRE GRILL
GR13 13" WIRE GRILL
GR17 17" WIRE GRILL




LGR11 11" LOUVERED GRILL
LGR13 13" LOUVERED GRILL
LGR17 17" LOUVERED GRILL




FGR11 11" FLAT GRILL
FGR13 13" FLAT GRILL
FGR17 17" FLAT GRILL



CRL13 13" CURVED POLYCARB LENS
CRL17 17" CURVED POLYCARB LENS




FLE11 11" FLAT CLEAR LENS
FLE13 13" FLAT CLEAR LENS
FLE17 17" FLAT CLEAR LENS




REF 9.5" DIAMETER REFRACTOR




UGR U- WIRE GUARD




WG-1 WIRE GUARD



WG-2 WIRE GUARD



GU-1 CAST ALUMINUM GUARD



GU-2 CAST ALUMINUM GUARD