



# BASELITE - DE-DP-DHE-DHP-DPV - LED - SPEC SHEET



PROJECT NAME: \_\_\_\_\_ PROJECT TYPE: \_\_\_\_\_

MODEL #	/	/	/	X	/	/	/	/	/	/	/
	A	B	C	D	E	F	G	H	I	J	K
EXAMPLE:	DHE1	41	E18	-	41	12WINC	3K	LDM120	FR3	CG1	41

\*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



DHE1/52/E18/52/100WINC/FR3/CG1/52

## A - SHADES

### DE-DHE SERIES

- DE1** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- DE2** - 25WLED (MAX), (4" GLASS), (4" GUARD)
- DHE1** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- DHE2** - 25WLED (MAX), (4" GLASS), (4" GUARD)

### DP-DHP SERIES

- DP1** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- DP2** - 25WLED (MAX), (4" GLASS), (4" GUARD)
- DHP1** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- DHP2** - 25WLED (MAX), (4" GLASS), (4" GUARD)

### DPV SERIES

- DPV1** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- DPV2** - 25WLED (MAX), (4" GLASS), (4" GUARD)

## B - FINISH OPTIONS

(SEE NOTES FOR LIMITATIONS)  
(SEE WEBSITE FOR SWATCH COLORS)  
20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,  
46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60,  
61, 62, 63, 70, 71, 72, 73

## C - MOUNTING OPTIONS

\* ALL FIXTURES COMES AS IS. NO OTHER MOUNTING APPLIES  
**E18** - COMES STANDARD WITH DE & DHE  
**STEM MOUNT**  
ST6, ST12, ST18, ST24, ST36, ST48, STXX

## D - MOUNTING ADD-ONS

**LED ADD-ONS**  
LWTM, LSLC, LSTC  
**UNIVERSAL ADD-ONS**  
LGSWL

## E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## F - LIGHT SOURCE

(SEE PAGE 2 FOR WATTAGE LIMITATIONS)  
**LIGHT EMITTED DIODE (LED)**  
10W, 12W, 25W

\*NOTE - MAX WATTAGE IS LISTED NEXT TO THE SHADE MODEL NUMBER IN SECTION "A". ALL WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR THE SAME MODEL NUMBER.

## G - LED COLOR TEMP

- 27K - 2700 KELVIN
- 3K - 3000 KELVIN
- 35K - 3500 KELVIN
- 4K - 4000 KELVIN
- 5K - 5000 K ELVIN

## H - ELECTRICAL OPTION

(SEE PAGE 2 FOR DIMMING OPTION SPECIFICATIONS)  
**LDM120**  
**LDM0-10**

## I - GLASS OPTIONS

**3" GLASS**  
(AVAILABLE FOR DE1, DHE1, DP1, DHP1, DPV1)  
CL3, CLT3, BL3, RE3, GR3,  
AH3, FR3, FRT3, PR3

**4" GLASS**  
(AVAILABLE FOR DE2, DHE2, DP2, DHP2, DPV2)  
CL4, CLT4, BL4, RE4, GR4,  
AH4, FR4, FRT4, PR4

## J - ACCESSORIES

**3" GUARDS**  
(AVAILABLE FOR DE1, DHE1, DP1, DHP1, DPV1)  
CG1, WG1


**4" GUARDS**  
(AVAILABLE FOR DE2, DHE2, DP2, DHP2, DPV2)  
CG2, WG2

## K - ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.


## NOTES

- (1). FINISH OPTIONS 40, 49, 54, 61, 62, 63, 70, 71, 72, 73 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (2). FINISH OPTIONS FOR SHADES  $\leq 10"$  IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES  $> 10"$  IN DIAMETER ARE WHITE ON THE INSIDE.
- (3). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS. \*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.). \*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.). \*ALL FIXTURES MOUNT TO A RECESSED 4-O JUNCTION BOX. \*FIXTURE DIMENSIONS MAY VARY  $\pm 0.25$ . \*RATED FOR WET LOCATION.




**DE1** H - 11.375" W - 15"

**DE2** H - 13.75" W - 16.25"  
3" GLASS & 3" GUARD AVAILABLE FOR DE1  
4" GLASS & 4" GUARD AVAILABLE FOR DE2




**DP1** H - 11.375" W - 15"

**DP2** H - 13.75" W - 16.25"  
3" GLASS & 3" GUARD AVAILABLE FOR DP1  
4" GLASS & 4" GUARD AVAILABLE FOR DP2

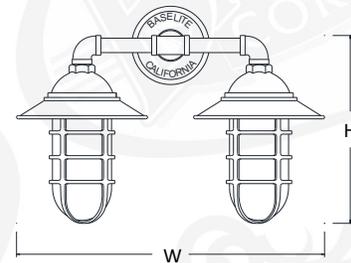


**DHE1** H - 11.375" W - 19"

**DHE2** H - 13.75" W - 21"  
3" GLASS & 3" GUARD AVAILABLE FOR DHE1  
4" GLASS & 4" GUARD AVAILABLE FOR DHE2



**DHP1** H - 11.375" W - 19"

**DHP2** H - 13.75" W - 21"  
3" GLASS & 3" GUARD AVAILABLE FOR DHP1  
4" GLASS & 4" GUARD AVAILABLE FOR DHP2



**DPV1** H - 4" W - 21.5"

**DPV2** H - 5.5" W - 26.25"  
3" GLASS & 3" GUARD AVAILABLE FOR DPV1  
4" GLASS & 4" GUARD AVAILABLE FOR DPV2



**C - MOUNTING OPTIONS**

**STEM MOUNTS**

\*STEMS RATED FOR DAMP LOCATION




**ST(XX) STEM MOUNT - 1/2" NPT**

XX = LENGTH OF STEM  
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)  
\*CANOPY NOT INCLUDED, ADD IN SECTION D  
\* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST


**D - MOUNTING ADD-ONS**

**LED – STEM AND ARM ADD-ONS**


\* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



**LWTM** WEATHERTIGHT LED WALL MOUNT



**LSLC** LED SLOPE CEILING CANOPY




**LSTC** LED STEM MOUNT CANOPY

**UNIVERSAL STEM AND ARM ADD-ONS**

\* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:

MODEL #: -/-/LWTM, TRB 1/2", LGSWL/-/-/  
A B C D E F G H I J K



**LGSWL 1/2" NPT SWIVEL**

For all shades greater than 7" wide in diameter

**F – LIGHT SOURCE**

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

**LIGHT EMITTING DIODE (LED)**

**LED 12W (MAX)** - DE1, DHE1, DP1, DHP1, DPV1  
**LED 25W (MAX)** - DE2, DHE2, DP2, DHP2, DPV2

**\*IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE MAX WATTAGE AVAILABILITY.

EXAMPLE: / LED25W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED10WF	10W	1280	>90	120-277 VAC	TRI-ELV *120V ONLY
LED12W	12W	1481	>90	120-277 VAC	See section "H"
LED25W	25W	2812	>90	120-277 VAC	See section "H"

@3500K



**H – ELECTRICAL OPTION**

BASELITE’S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE DRIVER AND FIXTURE. PLEASE SEE INFORMATION BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY.

**LED DIMMING OPTIONS**

(LED10WF – ONLY AVAILABLE WITH LDM120 - TRI-ELV DIMMING OPITON) ALL OTHER WATTAGES CAN CHOOSE FROM THE OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR FURTHER SPECIFICATIONS.

**LDM120 - TRIAC / ELV – INPUT 120 / 277V - DIMMING AT 120 VOLT ONLY**

**LDM0-10V – 0 – 10V – DIMMING AT 120 / 277 VOLTS**

**I – GLASS OPTIONS**

\* 3" GUARDS AVAILBLE FOR DE1, DHE1, DP1, DHP1, DPV1 \*4" GUARDS AVAILBLE FOR DE2, DHE2, DP2, DHP2, DPV2

\* : GLASS IS HEAT RESISTANCE BOROSILICATE. \*TEMPERD GLASS AVAILBLE UPON REQUEST. CONTANCT YOUR LOCAL SALES REPRESENTATIVE FOR INFORMATION OR CALL FACTORY FOR QUESTIONS.



**CL3** 3" CLEAR GLASS

**CL4** 4" CLEAR GLASS



**PR3** 3" PRISMATIC GLASS

**PR4** 4" PRISMATIC GLASS



**RE3** 3" RED GLASS

**RE4** 4" RED GLASS



**BL3** 3" BLUE GLASS

**BL4** 4" BLUE GLASS



**FR3** 3" FROSTED GLASS

**FR4** 4" FROSTED GLASS



**AH3** 3" AMBER HYDE GLASS


**AH4** 4" AMBER HYDE GLASS



**GR3** 3" GREEN GLASS

**GR4** 4" GREEN GLASS


GLASS – DIMENSIONS	
3" GLASS	Diameter 3.34"
	Height 6.93"
	Fitter 3.29"
4" GLASS	Diameter 4.34"
	Height 8.37"
	Fitter 4.29"




GLASS – MAX WATTAGE	
3" GLASS	– 100W INC / LED12W
4" GLASS	– 200W INC / LED25W

**J – ACCESSORIES**


\* 3" GUARDS AVAILBLE FOR DE1, DHE1, DP1, DHP1, DPV1 \*4" GUARDS AVAILBLE FOR DE2, DHE2, DP2, DHP2, DPV2




**WG1** 3" WIRE GUARD



**WG2** 4" WIRE GUARD



**CG1** 3" CAST GUARD



**CG2** 4" CAST GUARD