



BASELITE – GH – CF – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	X	/
EXAMPLE:	A GH12	B 41	C E16	D CB ½"	E 43	F 45W	G 3K	H LDM120	I PR3	J -	K 44	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



GH20/74/ST18/STC/74/150INC/AH3

A - SHADES

- GH SERIES**
GH12 - 42WCF (MAX), (3" GLASS), (3" GUARD)
GH14 - 42WCF (MAX), (3" GLASS), (3" GUARD)
GH16 - 42WCF (MAX), (3" GLASS), (3" GUARD)
GH18 - 42WCF (MAX), (4" GLASS), (4" GUARD)
GH20 - 42WCF (MAX), (4" GLASS), (4" GUARD)

B - FINISH OPTIONS

(SEE NOTES FOR LIMITATIONS)
 (SEE WEBSITE FOR SWATCH COLORS)
 20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,
 46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61,
 62, 63, 70, 71, 72, 73

C – MOUNTING OPTIONS

- ½" ARM EXTENSIONS**
 E1, E3, E4, B1, E16, E17
¾" ARM EXTENSIONS
 E3A, E4A, E5, E6, E7, E8, E9,
 E10, E11, E12, E13, B15, B15S,
 E19, E20, E21, E25
E14 - CREATE YOUR OWN
 (BASELITE WILL TAKE YOUR SKETCH AND
 FABRICATE A CUSTOM ARM EXTENSION TO
 MEET YOUR NEEDS).
COMPACT FLUORESCENT CORD MOUNT
 CFBLC, CFWHC, CFTCB, CFTCW, CFTCHB,
 CFTCHW, CFTLB, CFTLW, CFRCB, CFRCW
 CFRCHB, CFRCHW, CFFHB, CFFHW,
 CFHBLC, CFHWHC, CFCBLC, CFCWHC,
 CFCHB, CFCHW
STEM MOUNT
 DP24, ST6, ST12, ST18, ST24, ST36, ST48,
 STXX

D – MOUNTING ADD-ONS

- CF ADD-ONS**
 CFWTM, CFSLC, CFSTC
UNIVERSAL ADD-ONS
 FH ½", FH ¾", LGSWL

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)
COMPACT FLUORESCENT (CF)
 26W, 32W, 42W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)
CDM120
CDM277
CDM120/277

I – GLASS OPTIONS

- 3" GLASS** (AVAILABLE FOR GH12, GH14, GH16)
 CL3, CLT3, BL3, RE3, GR3,
 AH3, FR3, FRT3, PR3
4" GLASS (AVAILABLE FOR GH18, GH20)
 CL4, CLT4, BL4, RE4, GR4,
 AH4, FR4, FRT4, PR4

J – ACCESSORIES


- 3" GUARDS** (AVAILABLE FOR GH12, GH14, GH16)
 CG1, WG1
4" GUARDS (AVAILABLE FOR GH18, GH20)
 CG2, WG2

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- (1). FINISH OPTIONS 75,76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (3). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
 *ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
 *ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
 *ALL FIXTURES MOUNT TO A RECESSED 4-O JUNCTION BOX.
 *FIXTURE DIMENSIONS MAY VARY ± 0.25.
 *CORD AND CANOPY COME IN THE SAME COLOR.
 *RATED FOR WET LOCATION.

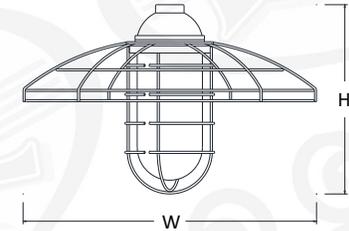


GH12	H - 9.875"	W - 12"
GH14	H - 9.875"	W - 14"
GH16	H - 9.875"	W - 16"
GH18	H - 11.5"	W - 18"
GH20	H - 11.5"	W - 20"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

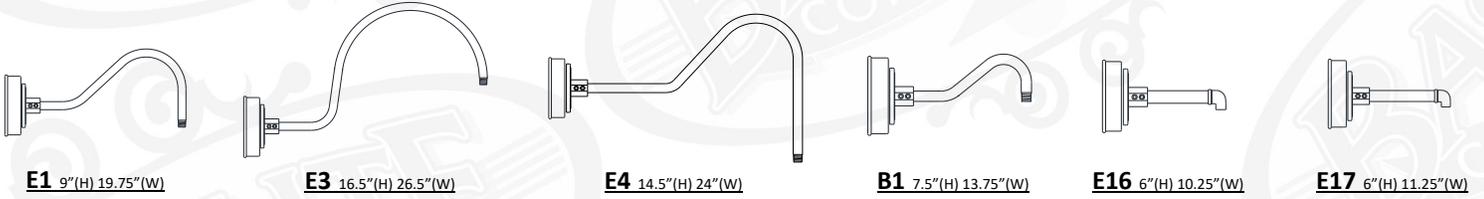


3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

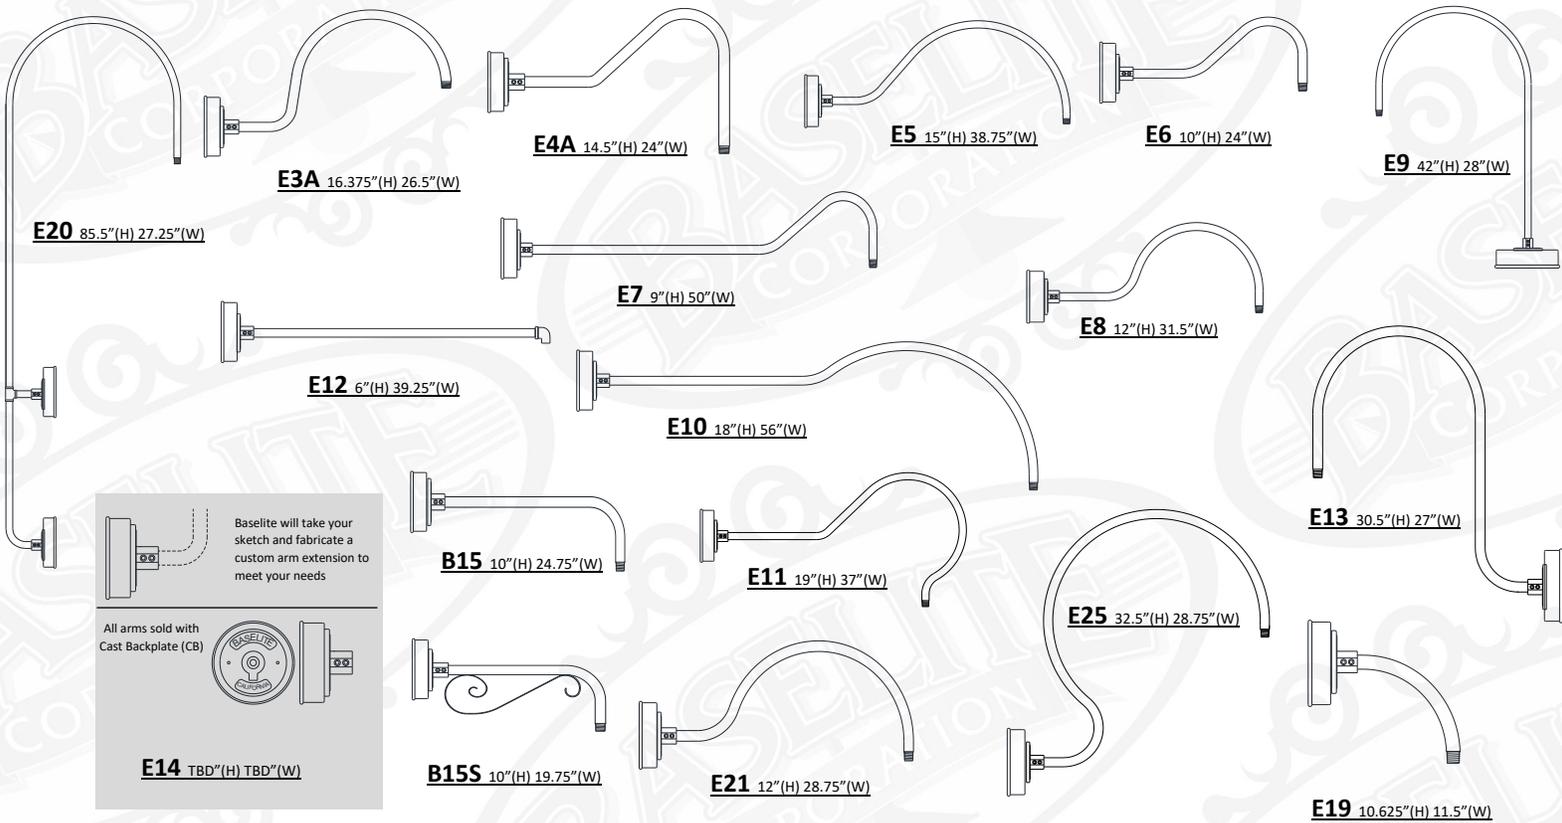

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION

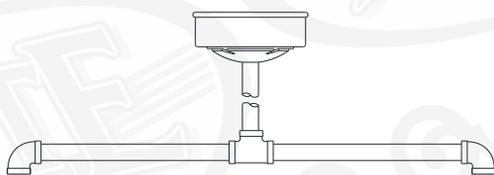

DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH CFSTC AND ST18



ST(XX) STEM MOUNT - 1/2" NPT
XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

COMPACT FLUORESCENT (CF)

CF 26W, 32W, OR 42(MAX) - GH12, GH14, GH16, GH18, GH20

***IMPORTANT** – FOR COMPACT FLUORESCENT (CF) LIGHT SOURCE, FIXTURES ARE LIMITED DUE TO THE SIZE OF THE SHADE. PLEASE SEE THE CHART TO THE LEFT TO SEE WHAT WATTAGE IS COMPARABLE FOR EACH FIXTURE WHEN ORDERING. EXAMPLE: / CF42W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
CF26W	26W	PER BULB SPECS	>90	120-277 VAC	See section "H"
CF32W	32W	PER BULB SPECS	>90	120-277 VAC	See section "H"
CF42W	42W	PER BULB SPECS	>90	120-277 VAC	See section "H"

H – ELECTRICAL OPTION

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY. FOR DIMMING BALLAST OPTION, PLEASE CHOOSE MARK X OR MARK VII, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE BALLAST AND FIXTURE.

COMPACT FLUORESCENT DIMMING OPTIONS

PROVIDED WITH ADVANCE TRANSFORMER, PLEASE CHOOSE MARK 10 OR MARK 7 WITH SPECIFIED VOLTAGE FROM THE LIST BELOW. CONTACT BALLAST MANUFACTURER FOR SPECIFICATIONS.

CDM7-120/277 - ADVANCE MARK 7 0-10v ELECTRICAL BALLST – 120/277 VOLT

CDM10-120 - ADVANCE MARK 10 ELECTRICAL BALLST – 120 VOLT

CDM10-277 - ADVANCE MARK 10 ELECTRICAL BALLST – 277 VOLT

I – GLASS OPTIONS

*3" GLASS AVAILABLE FOR GH12, GH14, GH16 *4" GLASS AVAILABLE FOR GH18, GH20



CL3 3" CLEAR GLASS
CL4 4" CLEAR GLASS



PR3 3" PRISMATIC GLASS
PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS
RE4 4" RED GLASS



BL3 3" BLUE GLASS
BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS
FR4 4" FROSTED GLASS




AH3 3" AMBER HYDE GLASS
AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS
GR4 4" GREEN GLASS

GLASS – DIMENSIONS

3" GLASS	Diameter	3.34"
	Height	6.93"
	Fitter	3.29"
4" GLASS	Diameter	4.34"
	Height	8.37"
	Fitter	4.29"

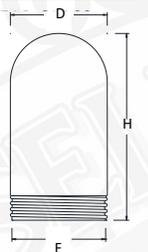


GLASS – MAX WATTAGE


3" GLASS	– 100W INC / LED12W
4" GLASS	– 200W INC / LED25W

J – ACCESSORIES


* 3" GUARDS AVAILABLE FOR GH12, GH14, GH16 *4" GUARDS AVAILABLE FOR GH18, GH20




WG1 WIRE GUARD



WG2 - WIRE GUARD



CG1 CAST GUARD



CG2 CAST GUARD