



# BASELITE – GH – INC – SPECIFICATION SHEET



PROJECT NAME: \_\_\_\_\_ PROJECT TYPE: \_\_\_\_\_

MODEL #	/	/	/	/	/	/	/	/	/	/	X	/
EXAMPLE:	A GH12	B 41	C E16	D CB ½"	E 43	F 45W	G 3K	H LDM120	I PR3	J -	K 44	

\*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



GH20/74/ST18/STC/74/150INC/AH3

## A - SHADES

### GH SERIES

- GH12** - 100WINC (MAX), (3" GLASS), (3" GUARD)
- GH14** - 100WINC (MAX), (3" GLASS), (3" GUARD)
- GH16** - 100WINC (MAX), (3" GLASS), (3" GUARD)
- GH18** - 100WINC (MAX), (4" GLASS), (4" GUARD)
- GH20** - 100WINC (MAX), (4" GLASS), (4" GUARD)

## B - FINISH OPTIONS

(SEE NOTES FOR LIMITATIONS)  
(SEE WEBSITE FOR SWATCH COLORS)  
20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61, 62, 63, 70, 71, 72, 73

## C – MOUNTING OPTIONS

### ½" ARM EXTENSIONS

E1, E3, E4, B1, E16, E17

### ¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9, E10, E11, E12, E13, B15, B15S, E19, E20, E21, E25

### E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

### CORD MOUNT

BLC, WHC, TCB, TCW, TCHB, TCHW, TLB, TLW, TLB, TLW, RCB, RCW, RCHB, RCHW, FHB, FHW, CBLC, CWHC, CHB, CHW

### STEM MOUNT

DP24, ST6, ST12, ST18, ST24, ST36, ST48, STXX

## D – MOUNTING ADD-ONS

### INC ADD-ONS

CB1/2", CB3/4", CBC1/2", CBC3/4", SLC1/2" SLC3/4" STC1/2"

### UNIVERSAL ADD-ONS

FH ½", FH ¾", LGSWL

## E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

### INCANDESCENT (INC)

100W

## G – LED COLOR TEMP

NOT AVAILABLE

## H – ELECTRICAL OPTION

NOT AVAILABLE

## I – GLASS OPTIONS

### 3" GLASS (AVAILABLE FOR GH12, GH14, GH16)

CL3, CLT3, BL3, RE3, GR3, AH3, FR3, FRT3, PR3

### 4" GLASS (AVAILABLE FOR GH18, GH20)

CL4, CLT4, BL4, RE4, GR4, AH4, FR4, FRT4, PR4

## J – ACCESSORIES

### 3" GUARDS (AVAILABLE FOR GH12, GH14, GH16)

CG1, WG1

### 4" GUARDS (AVAILABLE FOR GH18, GH20)


CG2, WG2

## K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## NOTES

- (1). FINISH OPTIONS 75,76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (3). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.  
\*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).  
\*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).  
\*ALL FIXTURES MOUNT TO A RECESSED 4-O JUNCTION BOX.  
\*FIXTURE DIMENSIONS MAY VARY ± 0.25.  
\*CORD AND CANOPY COME IN THE SAME COLOR.  
\*RATED FOR WET LOCATION.

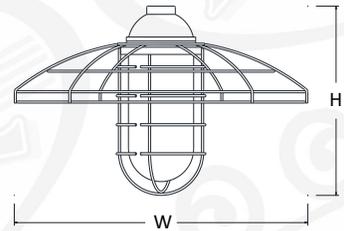


<b>GH12</b>	H - 9.875"	W - 12"
<b>GH14</b>	H - 9.875"	W - 14"
<b>GH16</b>	H - 9.875"	W - 16"
<b>GH18</b>	H - 11.5"	W - 18"
<b>GH20</b>	H - 11.5"	W - 20"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

\*ARMS RATED FOR WET LOCATION \* MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

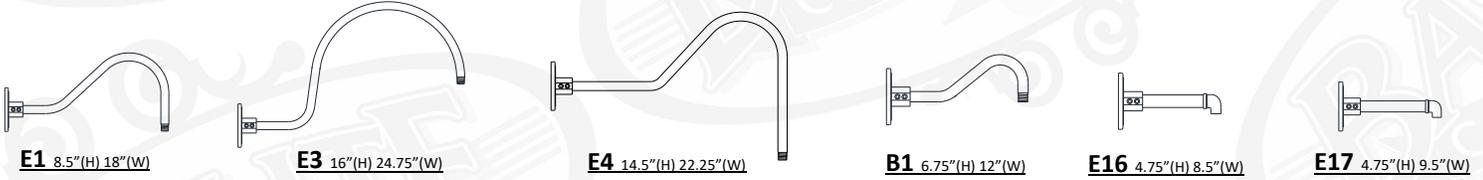

3/4" ARM EXTENSIONS

\*ARMS RATED FOR WET LOCATION \* MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

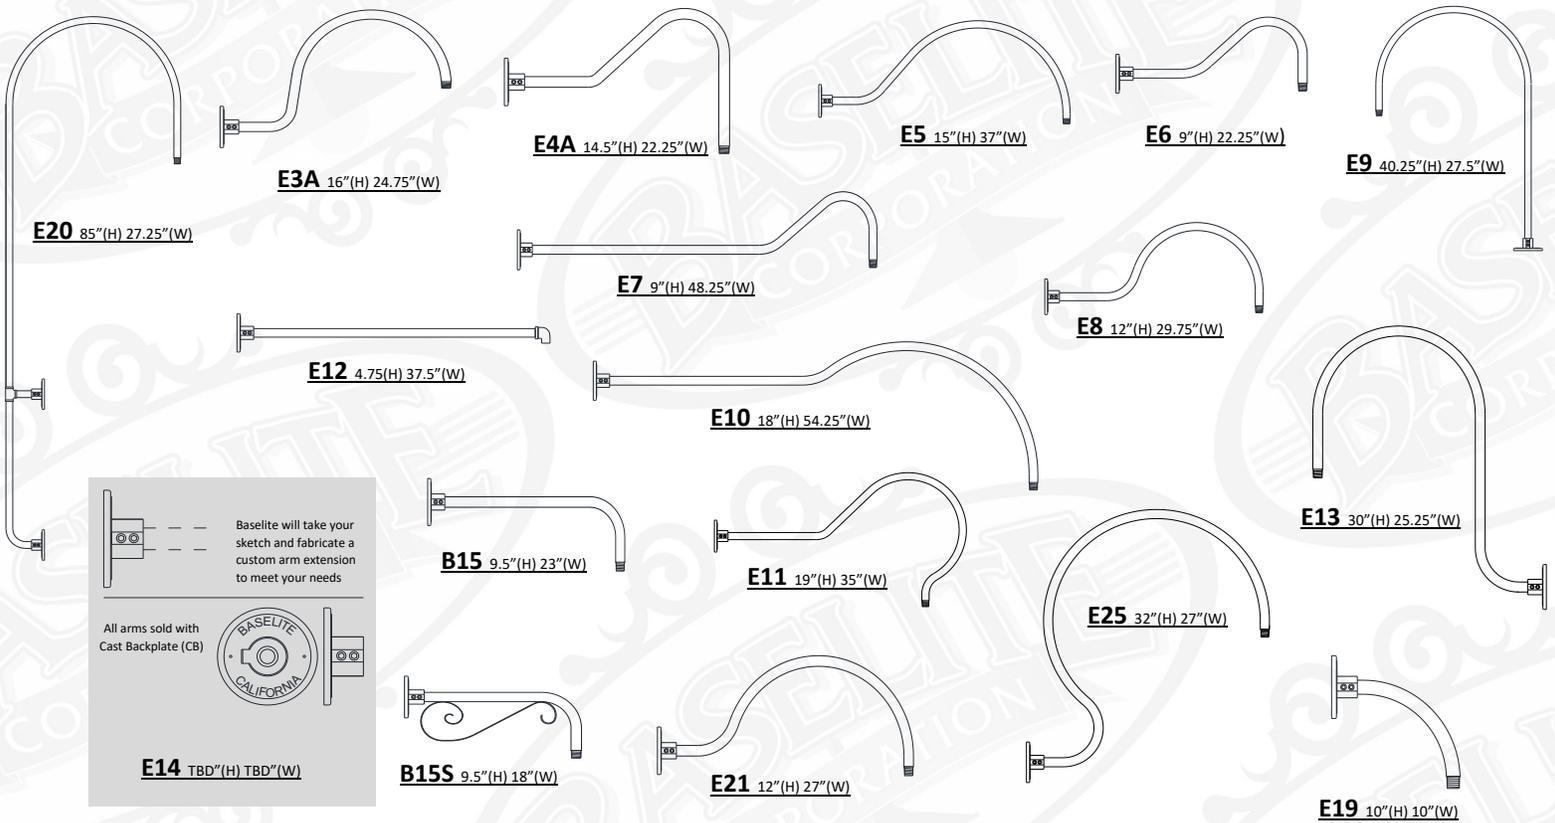


Baselite will take your sketch and fabricate a custom arm extension to meet your needs

All arms sold with Cast Backplate (CB)

**E14** TBD"(H) TBD"(W)

STEM MOUNTS

\*STEMS RATED FOR DAMP LOCATION

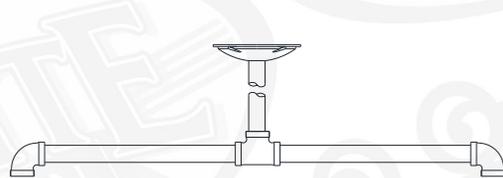

**DP24** DOUBLE PENDANT 20"(H) 24"(W)  
\*DP24 COMES STANDARD WITH STC AND ST18



**ST(XX)** STEM MOUNT - 1/2" NPT  
XX = LENGTH OF STEM  
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)  
\*CANOPY NOT INCLUDED, ADD IN SECTION D  
\* 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST



**C - MOUNTING OPTIONS (CONTINUED)**

**CORD MOUNTS**

\*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT  
\*CORDS RATED FOR DRY LOCATION \*CANOPY DIMENSIONS: .625" (H) 5.25" (W) \*CORD AND CANOPY COME IN THE SAME COLOR.



**BLC** 8' BLACK CORD  
**WHC** 8' WHITE CORD



**TCB** 8' BLACK CORD, CABLE, and LOOP  
**TCW** 8' WHITE CORD, CABLE, and LOOP



**TCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**TCHW** 8' WHITE CORD, 3' CHAIN, and LOOP



**TLB** 8' BLACK TELEPHONE CORD AND CABLE  
**TLW** 8' WHITE TELEPHONE CORD AND CABLE



**RCB** 8' BLACK CORD, CABLE, and LOOP  
**RCW** 8' WHITE CORD, CABLE, and LOOP




**RCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**RCHW** 8' WHITE CORD, 3' CHAIN, and LOOP



**FHB** 8' BLACK CORD WITH FLAT HUB  
**FHW** 8' WHITE CORD WITH FLAT HUB




**CBLC** 8' BLACK CORD and CABLE  
**CWLC** 8' WHITE CORD and CABLE




**CHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**CHW** 8' WHITE CORD, 3' CHAIN, and LOOP  
\* Loop may vary due to shade style

**D - MOUNTING ADD-ONS**


**ARM ADD-ONS**

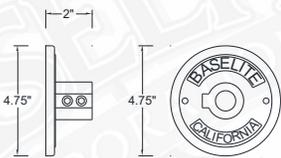


**CB 1/2"** CAST ALUMINUM BACKPLATE 1/2 NPT  
**CB 3/4"** CAST ALUMINUM BACKPLATE 3/4 NPT



**CBC 1/2"** 1/2" BACKPLATE COVER  
**CBC 3/4"** 3/4" BACKPLATE COVER  
\* Includes slip ring to hold 1/2" or 3/4" arm extension in place




**SLC 1/2"** SLOPE CEILING CANOPY 1/2"  
**SLC 3/4"** SLOPE CEILING CANOPY 3/4"  
\*(Slopes To 20 Degrees)



**STC 1/2"** 1/2" STEM MOUNT CANOPY

**UNIVERSAL STEM AND ARM ADD-ONS**

\* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:



**LGSWL** 1/2" NPT SWIVEL  
For all shades greater than 7" wide in diameter



**FH 1/2"** FLAT HUB 1/2"  
**FH 3/4"** FLAT HUB 3/4"



**F – LIGHT SOURCE**

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

INCANDESCENT (INC) <small>MED E26</small>					
<b>INC 100W - GH12, GH14, GH16, GH18, GH20</b>			*IMPORTANT – FOR INCANDESCENT (INC) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE AVAILABILITY CHART TO THE LEFT. EXAMPLE: / INC100W /		
OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
100WINC	100W	PER BULB SPECS	>90	120-277 VAC	N/A

**I – GLASS OPTIONS**

\*3" GLASS AVAILABLE FOR GH12, GH14, GH16    \*4" GLASS AVAILABLE FOR GH18, GH20



**CL3** 3" CLEAR GLASS  
**CL4** 4" CLEAR GLASS



**PR3** 3" PRISMATIC GLASS  
**PR4** 4" PRISMATIC GLASS



**RE3** 3" RED GLASS  
**RE4** 4" RED GLASS



**BL3** 3" BLUE GLASS  
**BL4** 4" BLUE GLASS



**FR3** 3" FROSTED GLASS  
**FR4** 4" FROSTED GLASS




**AH3** 3" AMBER HYDE GLASS  
**AH4** 4" AMBER HYDE GLASS



**GR3** 3" GREEN GLASS  
**GR4** 4" GREEN GLASS


GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"




GLASS – MAX WATTAGE	
3" GLASS – 100W INC / LED12W	

**J – ACCESSORIES**


\* 3" GUARDS AVAILABLE FOR GH12, GH14, GH16    \*4" GUARDS AVAILABLE FOR GH18, GH20




**WG1** WIRE GUARD



**WG2** WIRE GUARD



**CG1** CAST GUARD

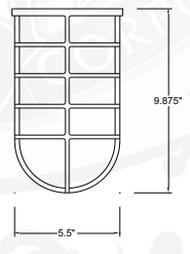

**CG2** CAST GUARD