



BASELITE – GH - LED – SPECIFICATION SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	/	/	/	X	/
EXAMPLE:	A GH12	B 41	C E16	D CB ½"	E 43	F 45W	G 3K	H LDM120	I PR3	J -	K 44	

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



GH20/74/ST18/STC/74/150INC/AH3

A - SHADES

GH SERIES

- GH12** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- GH14** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- GH16** - 12WLED (MAX), (3" GLASS), (3" GUARD)
- GH18** - 12WLED (MAX), (4" GLASS), (4" GUARD)
- GH20** - 12WLED (MAX), (4" GLASS), (4" GUARD)

B - FINISH OPTIONS

(SEE NOTES FOR LIMITATIONS)
(SEE WEBSITE FOR SWATCH COLORS)
20, 21, 22, 23, 40, 41, 41.5, 42, 43, 44, 45,
46, 48, 49, 50, 51, 52, 53, 54, 55, 59, 60, 61,
62, 63, 70, 71, 72, 73

C – MOUNTING OPTIONS

½" ARM EXTENSIONS

E1, E3, E4, B1, E16, E17

¾" ARM EXTENSIONS

E3A, E4A, E5, E6, E7, E8, E9,
E10, E11, E12, E13, B15, B15S,
E19, E20, E21, E25

E14 - CREATE YOUR OWN

(BASELITE WILL TAKE YOUR SKETCH AND FABRICATE A CUSTOM ARM EXTENSION TO MEET YOUR NEEDS).

LED CORD MOUNT

LBLC, LWHC, LTCB, LTCW, LTCHB, LTCHW,
LTLB, LTLW, LTLB, LTLW, LRCB, LRCW,
LRCHB, LRCHW, LFHB, LFHW, LHBLC,
LHWHC, LCBLC, LCWHC, LCHB, LCHW

STEM MOUNT

DP24, ST6, ST12, ST18, ST24, ST36, ST48,
STXX

D – MOUNTING ADD-ONS

LED ADD-ONS

LWTM, LSLC, LSTC

UNIVERSAL ADD-ONS

FH ½", FH ¾", LGSWL

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 4 FOR WATTAGE LIMITATIONS)

LIGHT EMITTED DIODE (LED)

10W, 12W

*NOTE – MAX WATTAGE IS LISTED NEXT TO THE SHADE MODEL NUMBER IN SECTION "A". ALL WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR THE SAME MODEL NUMBER.

G – LED COLOR TEMP

- 27K** – 2700 KELVIN
- 3K** – 3000 KELVIN
- 35K** – 3500 KELVIN
- 4K** – 4000 KELVIN
- 5K** – 5000 KELVIN

H – ELECTRICAL OPTION

(SEE PAGE 4 FOR DIMMING OPTION SPECIFICATIONS)

LDM120

LDM0-10

I – GLASS OPTIONS

3" GLASS (AVAILABLE FOR GH12, GH14, GH16)
CL3, CLT3, BL3, RE3, GR3,
AH3, FR3, FRT3, PR3

4" GLASS (AVAILABLE FOR GH18, GH20)
CL4, CLT4, BL4, RE4, GR4,
AH4, FR4, FRT4, PR4

J – ACCESSORIES

3" GUARDS (AVAILABLE FOR GH12, GH14, GH16)
CG1, WG1


4" GUARDS (AVAILABLE FOR GH18, GH20)
CG2, WG2

K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- (1). FINISH OPTIONS 75,76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (2). FINISH OPTIONS 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (3). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
*ALL ARMS COME WITH A CAST BACKPLATE (CB1/2", CB3/4", LWTM, CFWTM, ECT.).
*ACCORDING TO THE LIGHT SOURCE THE BACKPLATE MAY VARY IN SIZE. (EXAMPLE: LED LIGHT SOURCE WILL HAVE A DEEPER BACKPLATE TO HOUSE THE DRIVER.).
*ALL FIXTURES MOUNT TO A RECESSED 4-O JUNCTION BOX.
*FIXTURE DIMENSIONS MAY VARY ± 0.25.
*CORD AND CANOPY COME IN THE SAME COLOR.
*RATED FOR WET LOCATION.



GH12 H - 9.875" W - 12"

GH14 H - 9.875" W - 14"

GH16 H - 9.875" W - 16"

GH18 H - 11.5" W - 18"


GH20 H - 11.5" W - 20"



C - MOUNTING OPTIONS


1/2" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

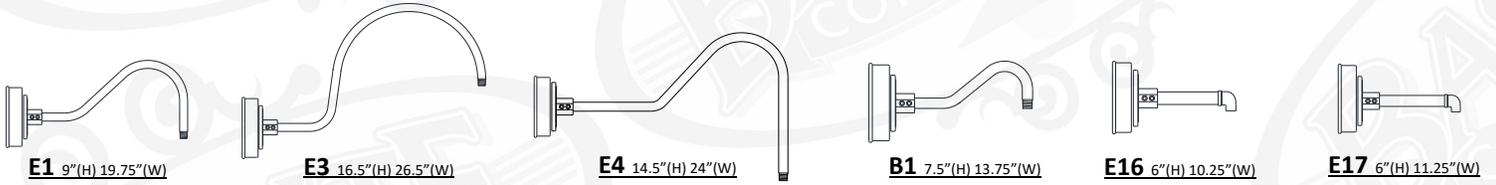

3/4" ARM EXTENSIONS

*ARMS RATED FOR WET LOCATION * MAXIMUM SECTIONS OF ARMS ARE DIMENSIONED

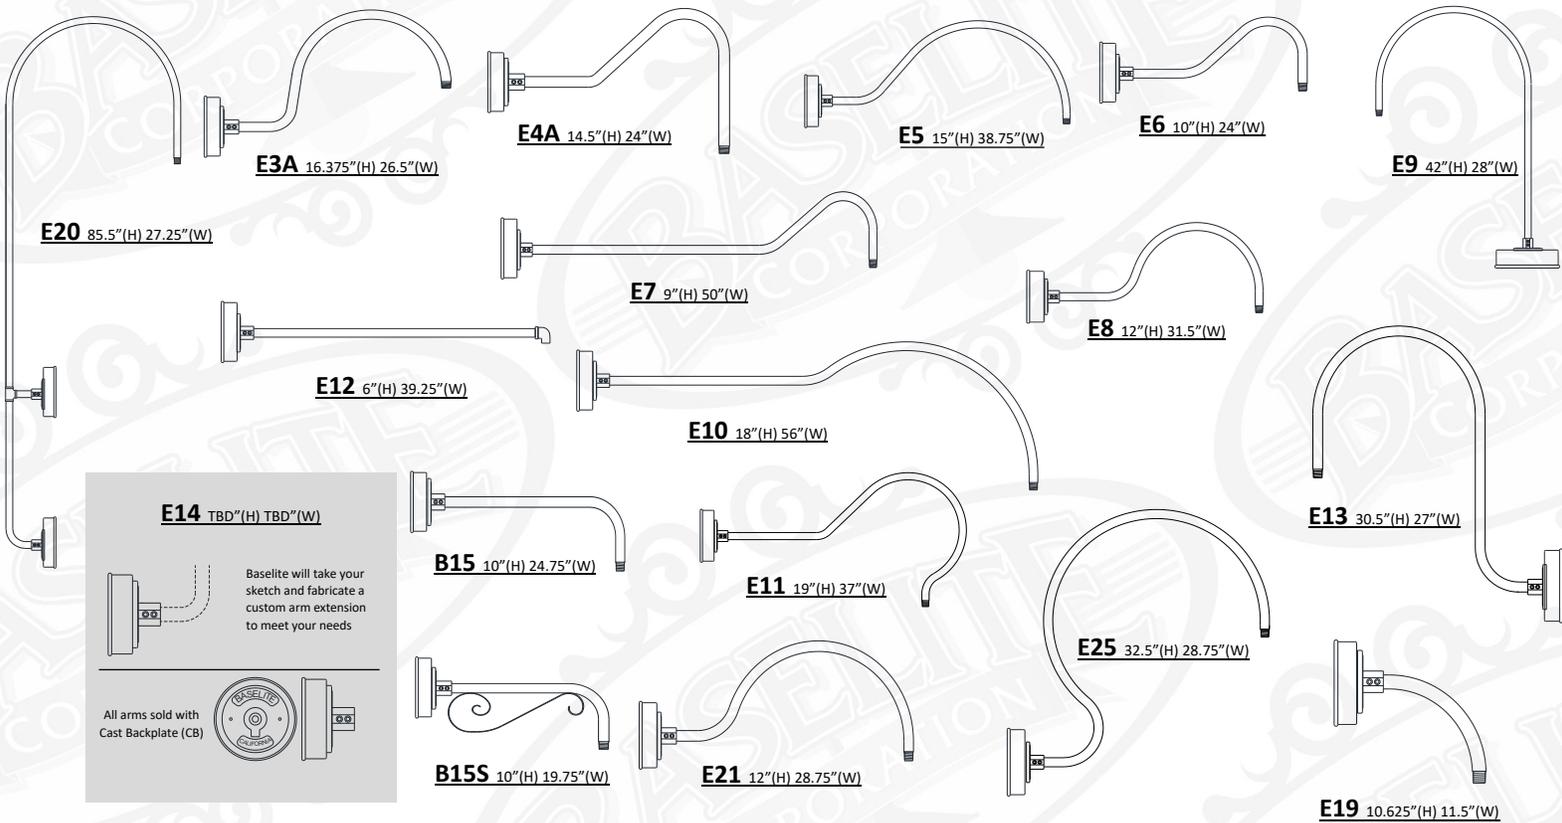

STEM MOUNTS

*STEMS RATED FOR DAMP LOCATION



DP24 DOUBLE PENDANT 20"(H) 24"(W)
*DP24 COMES STANDARD WITH LSTC AND ST18



ST(XX) STEM MOUNT - 1/2" NPT
XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D
* 1/4" NPT and 3/4" NPT AVAILABLE UPON REQUEST




C - MOUNTING OPTIONS (CONTINUED)

CORD MOUNTS

*CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER THAT WILL BE LOCATED INSIDE OF THE CANOPY. *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 4" (H) 5.5" (W) *CORD AND CANOPY COME IN THE SAME COLOR.

	LBLC 8' BLACK CORD LWHC 8' WHITE CORD		LTCB 8' BLACK CORD, CABLE, and LOOP LTCW 8' WHITE CORD, CABLE, and LOOP		LTCHB 8' BLACK CORD, 3' CHAIN, and LOOP LTCHW 8' WHITE CORD, 3' CHAIN, and LOOP
	LTLB 8' BLACK TELEPHONE CORD AND CABLE LTLW 8' WHITE TELEPHONE CORD AND CABLE		LRCB 8' BLACK CORD, CABLE, and LOOP LRCW 8' WHITE CORD, CABLE, and LOOP		LRCHB 8' BLACK CORD, 3' CHAIN, and LOOP LRCHW 8' WHITE CORD, 3' CHAIN, and LOOP
	LFHB 8' BLACK CORD WITH FLAT HUB LFHW 8' WHITE CORD WITH FLAT HUB		LCBLC 8' BLACK CORD and CABLE LCWHC 8' WHITE CORD and CABLE		LCHB 8' BLACK CORD, 3' CHAIN, and LOOP LCHW 8' WHITE CORD, 3' CHAIN, and LOOP * Loop may vary due to shade style




NOTES:
*DISTANCE TO LAMP (CF) 10"
*All compact fluorescent and LED housings may vary in size according to light source chosen.


D - MOUNTING ADD-ONS

STEM AND ARM ADD-ONS


* FOR LED OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER THAT WILL BE LOCATED INSIDE OF THE CANOPY.



LWTM WEATHERTIGHT LED WALL MOUNT




LSLC LED SLOPE CEILING CANOPY



LSTC LED STEM MOUNT CANOPY

UNIVERSAL STEM AND ARM ADD-ONS

* EXAMPLE FOR MULTIPLE MOUNTING ADD-ONS:



LGSWL 1/2" NPT SWIVEL
For all shades greater than 7" wide in diameter



FH 1/2" FLAT HUB 1/2"
FH 3/4" FLAT HUB 3/4"



F – LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

LIGHT EMITTING DIODE (LED)

LED 12W (MAX) - GH12, GH14, GH16, GH18, GH20

***IMPORTANT – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE MAX WATTAGE AVAILABILITY. EXAMPLE: /LED12W /**

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED10WF	10W	1280	>90	120-277 VAC	TRI-ELV *120V ONLY
LED12W	12W	1481 @3500K	>90	120-277 VAC	See section "H"

H – ELECTRICAL OPTION

BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES, SO RESTRICTIONS APPLY DUE TO THE SIZE OF THE DRIVER AND FIXTURE. PLEASE SEE INFORMATION BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY.

LED DIMMING OPTIONS

(LED10WF – ONLY AVAILABLE WITH **LDM120** - TRI-ELV DIMMING OPITON) ALL OTHER WATTAGES CAN CHOOSE FROM THE OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR FURTHER SPECIFICATIONS.

LDM120 - TRIAC / ELV – INPUT 120 / 277V - DIMMING AT 120 VOLT ONLY
LDM0-10V – 0 – 10V – DIMMING AT 120 / 277 VOLTS

I – GLASS OPTIONS

*NOTE: MUST USE TEMPERED GLASS FOR LIGHT FIXTURES USING HIGH INTENSITY DISCHARGE (HID) LIGHT SOURCE OPTION. *3" GLASS AVAILIABLE FOR GH12, GH14, GH16 *4" GLASS AVAILIABLE FOR GH18, GH20



CL3 3" CLEAR GLASS
CL4 4" CLEAR GLASS



PR3 3" PRISMATIC GLASS
PR4 4" PRISMATIC GLASS



RE3 3" RED GLASS
RE4 4" RED GLASS



BL3 3" BLUE GLASS
BL4 4" BLUE GLASS



FR3 3" FROSTED GLASS
FR4 4" FROSTED GLASS




AH3 3" AMBER HYDE GLASS
AH4 4" AMBER HYDE GLASS



GR3 3" GREEN GLASS
GR4 4" GREEN GLASS


GLASS – DIMENSIONS	
3" GLASS	
Diameter	3.34"
Height	6.93"
Fitter	3.29"
4" GLASS	
Diameter	4.34"
Height	8.37"
Fitter	4.29"




GLASS – MAX WATTAGE	
3" GLASS – INC100W / LED12W	
4" GLASS – INC100W / LED25W	

J – ACCESSORIES


* 3" GUARDS AVAILIABLE FOR GH12, GH14, GH16 *4" GUARDS AVAILIABLE FOR GH18, GH20




WG1 WIRE GUARD



WG2 WIRE GUARD



CG1 CAST GUARD



CG2 CAST GUARD