




FARM HOUSE

SPECIFICATION SHEET



S3.WG6.WH1.21P.BLC.60INC

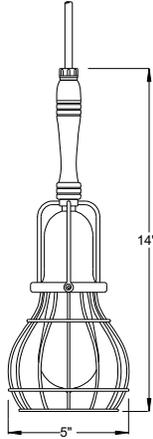

MODEL: S3.WG6

PREPARED BY: _____

TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: UL LISTED

FINISH – Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. The finish color is the same inside and out of the light fixture. See color chart below for color options. Some finish options are not available for certain fixtures. Custom colors and Marine options are available upon request. **Finishes #14PN, 19, 20, 20PB, 20SB, 21, 22, 23, 39, 40, 57, 58, 88 do not apply to this fixture.**

LAMP HOLDERS – Accommodates **Incandescent/LED** bulb – medium base porcelain socket, copper shell with nickel plate, rated 250v, 660W. 100 watt max. Fixture wattage can be de-rated to meet code compliance. Use desired wattage, max and below.

MOUNTING – Available with cord mounting or chain mounting. Fixtures are pre-wired with 96” cord.

REFLECTOR – (WH1)Handle spun from wood. (S3)Socket cover is spun from heavy gauge 1100-0 aluminum, ranging in thickness from .050 to .125. (WG6)Steel wire grill.

MODEL #	FINISH	LIGHT SOURCE				MOUNTING OPTIONS	ACCESSORIES
		INC	CF*	MH*	LED		
S3.WG6	SEE THE FINISH OPTION CHART ON THE WEBSITE AT THE BOTTOM OF THE PAGE UNDER “PRODUCT INFORMATION.”	100W (MAX)	N/A	N/A	N/A	BLC – 8 FT. BLACK CORD WHC – 8FT. WHITE CORD CHBLC – 8 FT. BLACK CORD, 36” CHAIN CHWHC – 8FT. WHITE CORD, 36” CHAIN.	WH1

* same finish color inside and out.
* remote ballast / driver.

.SUBJECT TO MODIFICATION WITHOUT NOTICE.



BASELITE CORPORATION
12260 EAST END AVE.
CHINO, CA 91710

PH: 877-999-1990
WEB: WWW.BASELITE.COM
EMAIL: SALES@BASELITE.COM

