



BASELITE – MODERN PENDANTS – MED – SPEC SHEET



PROJECT NAME: _____ PROJECT TYPE: _____

MODEL #	/	/	/	/	/	/	/	X	X	/	X	X	X
	A	B	C	D	E	F	G	H	I	J	K		
EXAMPLE:	3TD	80-59-81	BLC	CNK	41	MED150W							

*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



A - SHADES

MODERN PENDANTS

- 3TD - 100W (MAX)
- 3PEH - 100W (MAX)
- 3PE - 100W (MAX)
- PEA - 150W (MAX)
- PEB - 150W (MAX)
- PEC - 150W (MAX)
- PED - 150W (MAX)
- PEF - 150W (MAX)
- PEG - 150W (MAX)
- PEH - 150W (MAX)
- PEI - 150W (MAX)
- PEJ - 150W (MAX)
- PEK - 150W (MAX)
- PEO - 150W (MAX)
- PEOB - 100W (MAX)
- PEP - 150W (MAX)
- PEQ - 150W (MAX)
- PER - 150W (MAX)
- PES - 150W (MAX)
- PET - 150W (MAX)
- PEU - 150W (MAX)
- PEV - 150W (MAX)
- PEX - 150W (MAX)
- PEY - 150W (MAX)
- PEZ - 150W (MAX)
- DMD10 - 150W (MAX)
- SQB618 - 150W (MAX)
- S1 - 100W (MAX)
- TD8 - 100W (MAX)
- TD10 - 100W (MAX)
- TD12 - 100W (MAX)
- PEHD615 - 150W (MAX)
- MPA - 100W (MAX)
- BON18 - 100W (MAX)

B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)
(*SEE NOTES FOR LIMITATIONS*)
14, 15, 16, 17, 18, 19, 19P, 20, 20P,
20PB, 20SB, 21, 21P, 22, 22P, 23, 23P,
38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46,
48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59,
60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73,
74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84,
85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95,
96, 97, 98, 99, 100, MG.

C – MOUNTING OPTIONS

CORD MOUNT
MCB, MCW, MTCB, MTCW, MTCHB, MTCHW,
MTLB, MTLW, MRCB, MRCW, MRCHB,
MRCHW, MFHB, MFHW, MCBLC, MCWLC,
MCHB, MCHW

STEM MOUNT
ST6, ST12, ST18, ST24, ST36, ST48, STXX

D – MOUNTING ADD-ONS

ADD-ONS
CNK – MULTIPLE FIXTURE CANOPY
STC – STEM MOUNT CANOPY
SLC1/2" – SLOPE CEILING CANOPY 1/2"

E – MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

F – LIGHT SOURCE

(SEE PAGE 3 FOR WATTAGE LIMITATIONS)
MEDIUM BASE (MED) E26
100W, 150W, 200W

G – LED COLOR TEMP

NOT AVAILABLE

H – ELECTRICAL OPTION

NOT AVAILABLE

I – GLASS OPTIONS

CALL FACTORY FOR REQUEST.

J – ACCESSORIES

CALL FACTORY FOR REQUEST.


K – ACCESSORY COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

NOTES

- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
 - (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
 - (3). FINISH OPTIONS FOR SHADES ≤ 10" IN DIAMETER ARE THE SAME INSIDE AND OUT OF FIXTURE. SHADES > 10" IN DIAMETER ARE WHITE ON THE INSIDE.
 - (4). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
 - (5). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.
*ALL FIXTURES MOUNT TO A RECESSED 4-0 JUNCTION BOX.
*FIXTURE DIMENSIONS MAY VARY ±0.25.

SHADE DIMENSIONS

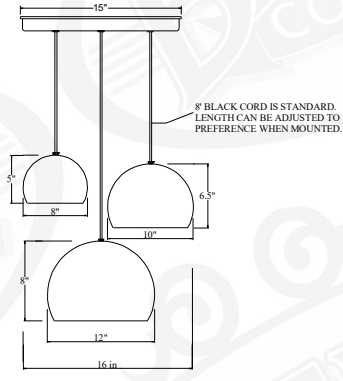


3TD H-TBD W-16"




PEA H-15" W-8.75"




PEB H-6.25" W-6"



3PE H-TBD W-16.75"



3PEH H-TBD W-14.5"



PEC H-8.75" W-7"

PROJECT NAME: _____ PROJECT TYPE: _____


A - SHADES




PED H-11" W-4.5"



PEF H-13" W-12"




PEG H-11" W-10"



PEH H-13.25" W-6"

PEI H-21" W-5.25"



PEJ H-10" W-5.75"

PEK H-7.5" W-5"




PEOB H-12" W-7"




PEP H-15" W-18"




PEQ H-13.5" W-16"




PEO H-16.5" W-14"




PES H-10" W-20"




PET H-12" W-18"




PEU H-9.5" W-14.25"



PER H-10.5" W-14.5"




PEX H-11" W-12"




DMD10 H-14.5" W-14"



SQB618 H-18" W-6"



PEV H-14.25" W-16.25"



PEY H-16.75" W-19"



TD8 H-6.625" W-8"

TD10 H-8" W-10"

TD12 H-9.375" W-12"




S1 H-2.625" W-2"



MPA H-14" W-5.5"



PEZ H-14.5" W-9.75"



BON18 H-8.5" W-18.5"



C - MOUNTING OPTIONS

D - MOUNTING ADD-ONS

STEM MOUNT


*STEMS RATED FOR DAMP LOCATION * 1/4" NPT AND 3/4" NPT AVAILABLE UPON REQUEST




ST(XX) STEM MOUNT - 1/2" NPT
XX = LENGTH OF STEM
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)
*CANOPY NOT INCLUDED, ADD IN SECTION D



CNK CANOPY For MULTIPLE FIXTURES
*CNK dimensions vary on number of fixtures applied



SLC 1/2" SLOPE CEILING CANOPY 1/2"
*(Slopes To 20 Degrees)



STC 1/2" 1/2" STEM MOUNT CANOPY

CORD MOUNTS

*INCANDESCENT MAX WATTAGE 150 WATT. CALL FACTORY FOR HIGHER WATTAGES. LOOPS, CABLES, AND CHAINS AVAILABLE ONLY FOR INCANDESCENT *CORDS RATED FOR DRY LOCATION *CANOPY DIMENSIONS: 2" (H) 5.75" (W)



MCB 8' BLACK CORD
MCW 8' WHITE CORD



MTCB 8' BLACK CORD, CABLE, and LOOP
MTCW 8' WHITE CORD, CABLE, and LOOP



MTCHB 8' BLACK CORD, 3' CHAIN, and LOOP
MTCHW 8' WHITE CORD, 3' CHAIN, and LOOP



MTLB 8' BLACK TELEPHONE CORD AND CABLE
MTLW 8' WHITE TELEPHONE CORD AND CABLE




MRCB 8' BLACK CORD, CABLE, and LOOP
MRCW 8' WHITE CORD, CABLE, and LOOP



MRCMB 8' BLACK CORD, 3' CHAIN, and LOOP
MRCMW 8' WHITE CORD, 3' CHAIN, and LOOP



MFHB 8' BLACK CORD WITH FLAT HUB
MFHW 8' WHITE CORD WITH FLAT HUB



MCLB 8' BLACK CORD and CABLE
MCLW 8' WHITE CORD and CABLE



MCHB 8' BLACK CORD, 3' CHAIN, and LOOP
MCHW 8' WHITE CORD, 3' CHAIN, and LOOP
* Loop may vary due to shade style

F - LIGHT SOURCE

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS.

MEDIUM BASE (MED) E26

100W (MAX) - 3TD, 3PEH, 3PE, PEZ, S1, TD8, TD10, TD12, MPA, BON18
150W (MAX) - PEA, PEB, PEC, PED, PEF, PEG, PEH, PEI, PEJ, PEK, PEO, PEP, PEQ, PER, PES, PET, PEU, PEV, PEX, PEY, PEZ, DMD10, SQB618, WRO, WRO1, WRO2, PEHD615

*IMPORTANT - FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE SIZE OF THE DRIVER.
EXAMPLE: / MED150W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
MED100W	100W	PER BULB SPECS	>90	120-277 VAC	N/A
MED150W	150W	PER BULB SPECS	>90	120-277 VAC	N/A

*FIXTURE WATTAGE CAN BE DE-RATED TO MEET CODE COMPLIANCE "CFXXW" - XX = DESIRED WATTAGE RATING BELOW MAX.