



# BASELITE – OPAL BALL – LED – SPECIFICATION SHEET



PROJECT NAME: \_\_\_\_\_ PROJECT TYPE: \_\_\_\_\_

MODEL #	/	/	/	/	/	/	/	/	/	X	X	X
	A	B	C	D	E	F	G	H	I	J	K	
EXAMPLE:	W513	41	E16	SQ 1/2"	43	100W	3K	LDM120	-	-	-	

\*SKIP SECTION IF OPTION DOES NOT APPLY

NOTES: **BABA COMPLIANT**



## A - SHADES

- OPAL BALL (ACRYLIC)**  
**OB8** - 10WLED (MAX)  
**OBW8** - 10WLED (MAX)  
**OB10** - 10WLED (MAX)  
**OB10** - 10WLED (MAX)  
**OB12** - 25WLED (MAX)  
**OB14** - 25WLED (MAX)  
**OB16** - 25WLED (MAX)  
**OB18** - 25WLED (MAX)  
**OB20** - 25WLED (MAX)  
**OB22** - 25WLED (MAX)  
**OB24** - 25WLED (MAX)  
**2OB8** - 10WLED (MAX)  
**OBF10** - 10WLED (MAX)

## B - FINISH OPTIONS

(SEE WEBSITE FOR SWATCH COLORS)  
 (\*SEE NOTES FOR LIMITATIONS\*)  
 14, 15, 16, 17, 18, 19, 19P, 20, 20P, 20PB, 20SB, 21, 21P, 22, 22P, 23, 23P, 38, 39, 40, 41, 41.5, 42, 43, 44, 45, 46, 48, 49, 50, 51, 52, 53, 54, 55, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100, MG.

## C - MOUNTING OPTIONS

- LED CORD MOUNT**  
 LMCB, LMCW, LMTCB, LMTCW, LMTCHB, LMTCHW, LMTLB, LMTLW, LMR CB, LMRCW, LMRCHB, LMRCHW, LMFHB, LMFHW, LMCBLC, LMCWLC, LMCHB, LMCHW
- STEM MOUNT**  
 DP24, DWM, ST6, ST12, ST18, ST24, ST36, ST48, STXX
- WALL MOUNT**  
 WM17X, WM21X

## D - MOUNTING ADD-ONS

**INC ADD-ONS**  
 LSLC1/2", LSLC3/4", LSTC1/2"

**UNIVERSAL ADD-ONS**  
 LCNK

## E - MOUNTING COLOR

SEE SECTION "B" FOR COLOR OPTIONS.

## F - LIGHT SOURCE

(SEE PAGE 3 FOR WATTAGE LIMITATIONS)  
**LIGHT EMITTED DIODE (LED)**  
**10W, 12W, 25W**

\*NOTE - MAX WATTAGE IS LISTED NEXT TO THE SHADE MODEL NUMBER IN SECTION "A". ALL WATTAGES BELOW THAT ARE ALSO AVAILABLE FOR THE SAME MODEL NUMBER.

## G - LED COLOR TEMP

- 27K** - 2700 KELVIN  
**3K** - 3000 KELVIN  
**35K** - 3500 KELVIN  
**4K** - 4000 KELVIN  
**5K** - 5000 KELVIN

## H - ELECTRICAL OPTION

(SEE PAGE 3 FOR DIMMING OPTION SPECIFICATIONS)  
**LDM120**  
**LDM0-10V**

## I - GLASS OPTIONS

NOT AVAILABLE

## J - ACCESSORIES

NOT AVAILABLE

## K - ACCESSORY COLOR


NOT AVAILABLE

## NOTES


- (1). FINISH OPTIONS 20, 21, 22, 23 ARE FOR SOLID BRASS FIXTURES ONLY.
- (2). FINISH OPTIONS 19, 21, 22, 23, 75, 76, 77, 83, 84, 88, 93 AND 98 ARE APPLIED BY HAND. THESE FINISHES WILL VARY IN CONSISTENCY.
- (3). FINISH OPTIONS 19, 38, 39, 40, 49, 54, 57, 58, 61, 62, 63, 70, 71, 72, 73, 78, 83, 84, 88, 92, 93, 98 ONLY AVAILABLE INSIDE AND OUT OF FIXTURE. OTHER FINISHES ARE WHITE INSIDE.
- (4). FINISH OPTIONS 61, 62, 70, 71, 72, 73 ARE FINISHED WITH A SUPERCHROME ON THE INSIDE FOR ALL LED LIGHT SOURCE OPTIONS.
- (5). COLOR CORDS ARE NOT APPLICABLE FOR LED OPTIONS.  
 \*ALL FIXTURES MOUNT TO A 4-O JUNCTION BOX.  
 \*FIXTURE DIMENSIONS MAY VARY ± 0.25.

- (6). MATERIAL - ACRYLIC OPAL BALL

\*LARGER SIZES AVAILABLE UPON REQUEST. UP TO 36". THESE SIZES ARE CUSTOM MADE. CALL FACTORY FOR DETAILS.




	HEIGHT	WIDTH
<b>OB8</b>	8"	8"
<b>OB10</b>	10"	10"
<b>OB12</b>	12"	12"
<b>OB14</b>	14"	14"
<b>OB16</b>	16"	16"
<b>OB18</b>	18"	18"
<b>OB20</b>	20"	20"
<b>OB22</b>	22"	22"
<b>OB24</b>	24"	24"




	HEIGHT	WIDTH
<b>2OB8</b>	16"	16" TO 27.5"


\*FIXTURE COMES AS SHOWN  
 \*OTHER MOUNTING OPTIONS DO NOT APPLY




	HEIGHT	WIDTH
<b>SCPGOB12</b>	16"	13.5"



	HEIGHT	WIDTH
<b>OBR10</b>	22"	10"



	HEIGHT	WIDTH
<b>OBW8</b>	12"	8"




	HEIGHT	WIDTH
<b>OBF10</b>	11"	9.5"




**C - MOUNTING OPTIONS**

**STEM MOUNTS**


\*STEMS RATED FOR DAMP LOCATION \*DP24 COMES STANDARD WITH STC AND ST18 \*3/4" NPT AVAILABLE UPON REQUEST

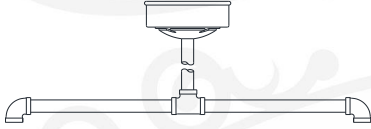

**DP24 - DOUBLE PENDANT**



**DWM - DOUBLE WALL MOUNT**



**STQ(XX) - STEM- 1/4" NPT**

**ST(XX) - STEM- 1/2" NPT**


XX = LENGTH OF STEM  
(EXAMPLE - "ST18" = STEM MOUNT 18" LENGTH)  
\*CANOPY NOT INCLUDED, ADD IN SECTION D

**L.E.D. CORD MOUNTS**

\*FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY. \*CORDS RATED FOR DRY LOCATION  
\*CANOPY DIMENSIONS: 4" (H) 5.5" (W) \*CORD AND CANOPY COME IN THE SAME COLOR.



**LMCB** 8' BLACK CORD  
**LMCW** 8' WHITE CORD




**LMTCB** 8' BLACK CORD, CABLE, and LOOP  
**LMTCW** 8' WHITE CORD, CABLE, and LOOP



**LMTCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**LMTCHW** 8' WHITE CORD, 3' CHAIN, and LOOP



**LMTLB** 8' BLACK TELEPHONE CORD AND CABLE  
**LMTLW** 8' WHITE TELEPHONE CORD AND CABLE




**LMRCB** 8' BLACK CORD, CABLE, and LOOP  
**LMRCW** 8' WHITE CORD, CABLE, and LOOP




**LMRCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**LMRCHW** 8' WHITE CORD, 3' CHAIN, and LOOP



**LMFHB** 8' BLACK CORD WITH FLAT HUB  
**LMFHW** 8' WHITE CORD WITH FLAT HUB




**LMCBLC** 8' BLACK CORD and CABLE  
**LMCWCW** 8' WHITE CORD and CABLE




**LMCHB** 8' BLACK CORD, 3' CHAIN, and LOOP  
**LMCHW** 8' WHITE CORD, 3' CHAIN, and LOOP  
\* Loop may vary due to shade style

**L.E.D. WALL MOUNT**



**WM17X** HEIGHT 11" WIDTH 12.25"




**WM21X** HEIGHT 4.75" WIDTH 9.5"

**D - MOUNTING ADD-ONS**

**L.E.D. STEM ADD-ONS**

\* FOR LED & COMPACT FLUORESCENT OPTIONS, CANOPIES WILL VARY IN SIZE DUE TO SIZE OF THE DRIVER/BALLAST THAT WILL BE LOCATED INSIDE OF THE CANOPY.



**LSLC 1/2"** SLOPE CEILING CANOPY 1/2"



**LSTC 1/2"** 1/2" STEM MOUNT CANOPY

**LSLC 3/4"** SLOPE CEILING CANOPY 3/4"  
\* (Slopes to 20 Degrees)



**D - MOUNTING ADD-ONS (CONTINUED)**

**UNIVERSAL STEM AND ARM ADD-ONS**



**LCNK** CANOPY For MULTIPLE FIXTURES  
\*CNK dimensions vary on number of fixtures applied

**F – LIGHT SOURCE**

BASELITE'S PUBLISHED LUMINAIRE PHOTOMETRIC TESTING WAS PERFORMED IN A 3-METER INTEGRATING SPHERE USING THE 4TT GEOMETRY METHOD. DATA IS CONSIDERED TO BE REPRESENTATIVE OF THE CONFIGURATIONS SHOWN, WITHIN THE TOLERANCES ALLOWED BY LIGHTING FACTS. TO OBTAIN AN IES FILE SPECIFIC TO YOUR PROJECT, PLEASE CONTACT THE FACTORY.

**LIGHT EMITTING DIODE (LED)**

**LED 10W (MAX)**- OB8, OBW8, 2OB8, OB10, OBF10, OBR10  
**LED 25W (MAX)**- OB12, OB14, OB16, OB18, OB20, OB22, OB24

**\*IMPORTANT** – FOR LIGHT EMITTED DIODE (LED) LIGHT SOURCE OPTION, FIXTURES ARE LIMITED DUE TO SIZE OF THE FIXTURE AND THE CORD WATTAGE RESTRICTIONS. PLEASE SEE MAX WATTAGE AVAILABILITY. **EXAMPLE:** / LED25W /

OPTION	WATTAGE	LUMENS	CRI	VOLTAGE	DIMMING
LED10WF	10W	1280	>90	120-277 VAC	TRI-ELV *120V ONLY
LED12W	12W	1481	>90	120-277 VAC	See section "H"
LED25W	25W	2812	>90	120-277 VAC	See section "H"

@3500K

**H – ELECTRICAL OPTION**

MOST BASELITE'S ELECTRICAL OPTIONS ARE ONLY COMPATIBLE FOR CERTAIN FIXTURES. PLEASE SEE NOTES BELOW AND FOR FURTHER DETAILS CONTACT THE FACTORY.

**LED DIMMING OPTIONS**

(LED10WF – ONLY AVAILABLE WITH **LDM120** - TRI-ELV DIMMING OPITON) ALL OTHER WATTAGES CAN CHOOSE FROM THE OPTIONS BELOW. CONTACT DRIVER MANUFACTURER FOR FURTHER SPECIFICATIONS.

**LDM120** - TRIAC / ELV – INPUT 120 / 277V - DIMMING AT 120 VOLT ONLY  
**LDM0-10V** – 0 – 10V – DIMMING AT 120 / 277 VOLTS