




FARM HOUSE

SPECIFICATION SHEET



TRF18.49.ST12.STC.49.100INC

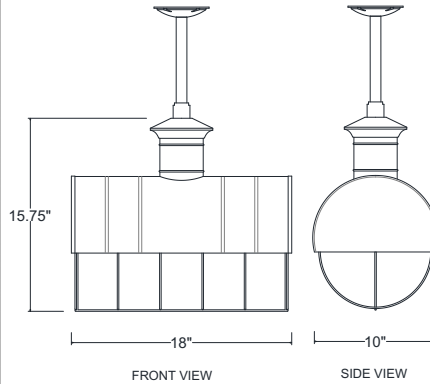

MODEL: TRF18

PREPARED BY: _____

TYPE: _____

JOB NAME: _____

DATE: _____

CERTIFICATION: **UL LISTED**

BABA COMPLIANT

FINISH – Five stage pretreatment process, coated with a lead free TGI C polyester powder coat finish. White is standard inside reflectors, some finish options excluded. See color chart on website for color options (unless specified). Some finish options are not available for certain fixtures. Custom colors and Marine options are available upon request.

LAMP HOLDERS – Medium Base (E26) – LED or incandescent bulb can be used. Porcelain socket, copper shell with nickel plate, rated 250V, 660W. **LED** – Designed to last with up to 50,000 hours, depending on installation location and ambient temperature.

MOUNTING – Available with stem mount only. Supplied 1/2" stem mount, stem length determined by customer. 48" leads for wiring.

REFLECTOR – Shade spun heavy gauge 1100-0 aluminum.

MODEL #	FINISH	LIGHT SOURCE				MOUNTING OPTIONS	ACCESSORIES
		INC	CF *	MH *	LED		
TRF18	14, 15, 16, 17, 18, 19, 21, 22, 23, 41, 42, 43, 44, 45, 46, 48*, 49*, 50, 51, 52, 53, 54*, 55, 58*, 59, 60, 61*, 62*, 63*, 64, 65, 66, 70*, 71*, 72*, 73*, 74, 75, 76, 77, 78*, 79, 80, 81, 82, 83*, 84*, 85, 86, 87, 89, 90, 91, 92*, 93*, 94*, 95, 96, 97, 98*, 99, 100	150W (MAX)	N/A	N/A	35W (MAX)	STEM MOUNT	N/A

* same finish color inside and out.

* remote ballast / driver.

.SUBJECT TO MODIFICATION WITHOUT NOTICE.



BASELITE CORPORATION
12260 EAST END AVE.
CHINO, CA 91710

PH: 877-999-1990
WEB: WWW.BASELITE.COM
EMAIL: SALES@BASELITE.COM

